

# Smart Curtailment for Bats: Testing Efficacy with Multiple Data Streams at Three Wind Energy Facilities

Paul Rabie<sup>1</sup>, Amanda Hale<sup>1</sup>, Mike True<sup>1</sup>, Rhett Good<sup>1</sup>, Kevin Heist<sup>1</sup>, Brogan Morton<sup>2</sup>, and Jon Ritter<sup>2</sup> | <sup>1</sup>WEST, Cheyenne, WY and <sup>2</sup>Wildlife Imaging Systems, Hinesburg, VT




# Introduction

Around the globe, wind turbine-related bat mortality is a conservation challenge for wildlife managers and the wind energy industry. These mortalities are an important issue because bats have low reproductive potential and require high adult survivorship to avoid population declines. Given the increasing demand for wind energy to help meet decarbonization goals, coupled with increasing evidence that bats are attracted to wind turbines, developing cost-effective and practical minimization impact strategies imperative. "Smart curtailment" strategies incorporate site-specific information to identify high-risk periods for bats, with the potential to provide more conservation value for less power loss compared to traditional blanket curtailment methods. Optimized Smart Curtailment™ (OSC)™, developed by WEST, reduces bat fatalities while maximizing power production by curtailing wind turbines when a Bayesian decision tree model indicates higher risk conditions for bats and lower energy production potential.

# Objective


Validate OSC at 3 operational wind energy facilities in the US in a multiyear study.

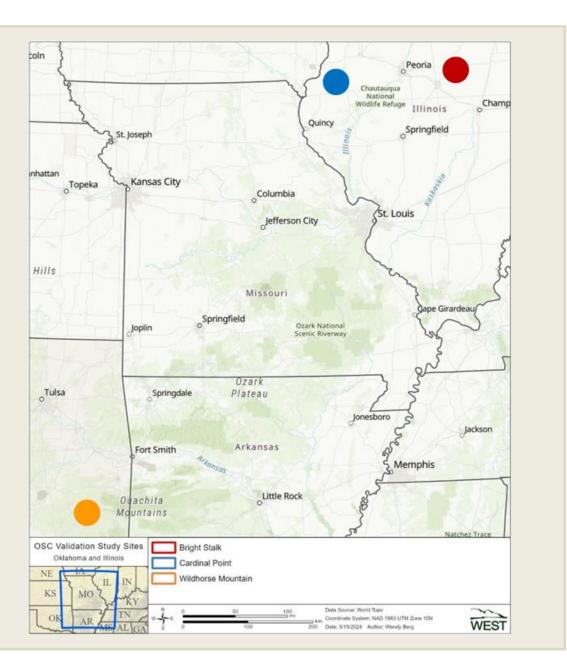

## **Test of OSC vs Blanket Curtailment in 2024**


### Cardinal Point Wind Energy Facility

- OSC developed using acoustic data from July – Oct in 2022 and 2023
  - Designed to provide ≥60% risk reduction across the entire bat-active season

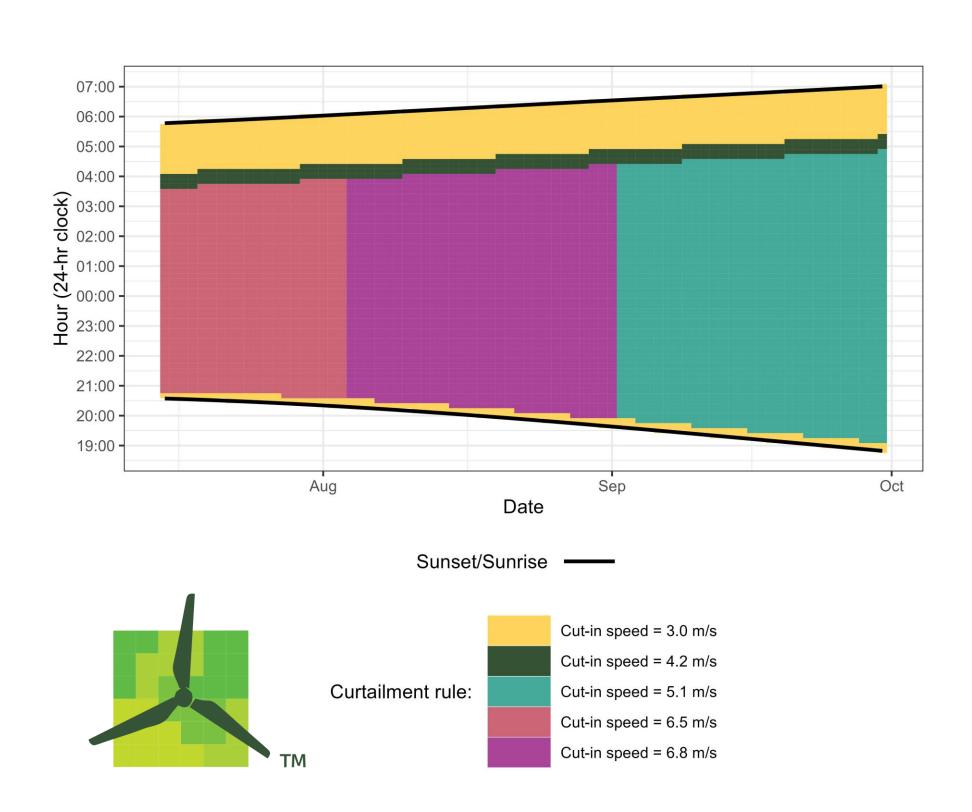



- Implemented July 15 September 30
  - 30 OSC turbines
- 30 6.3 m/s blanket curtailment turbines

## Relationships between Fatality Estimates and Bat Activity

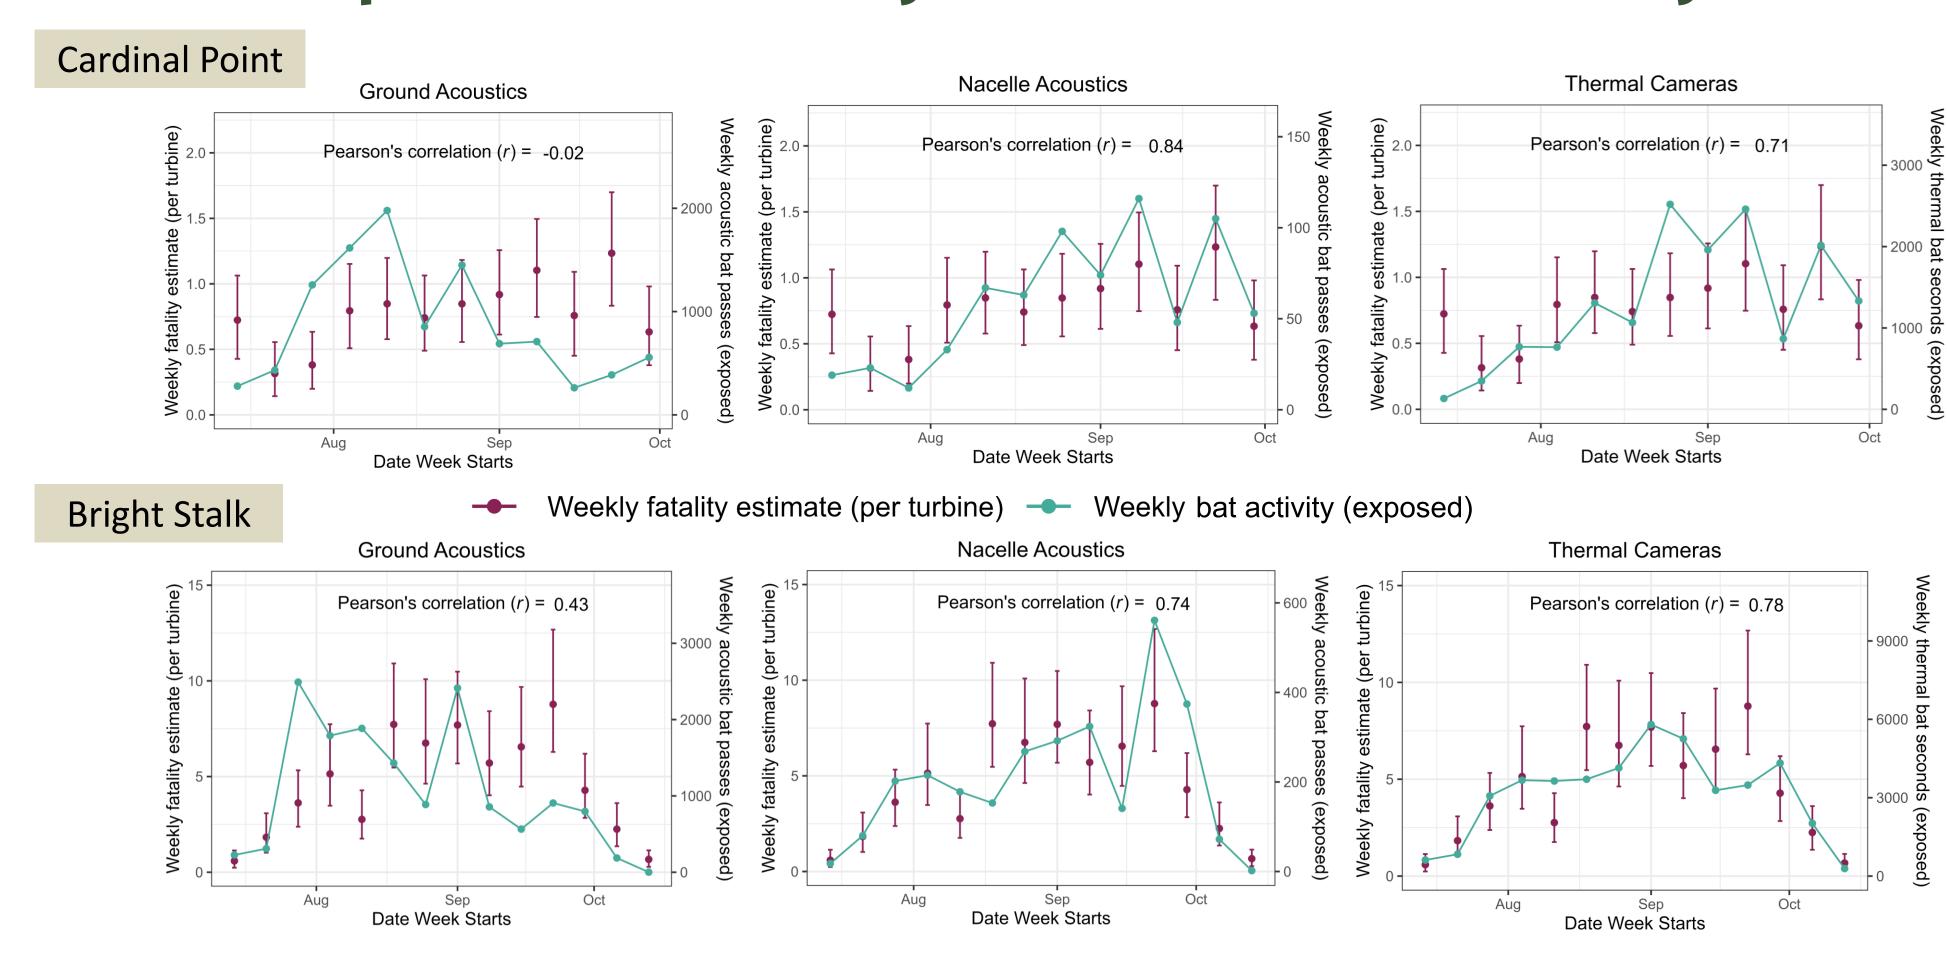


## Patterns of Acoustic and Thermal Activity

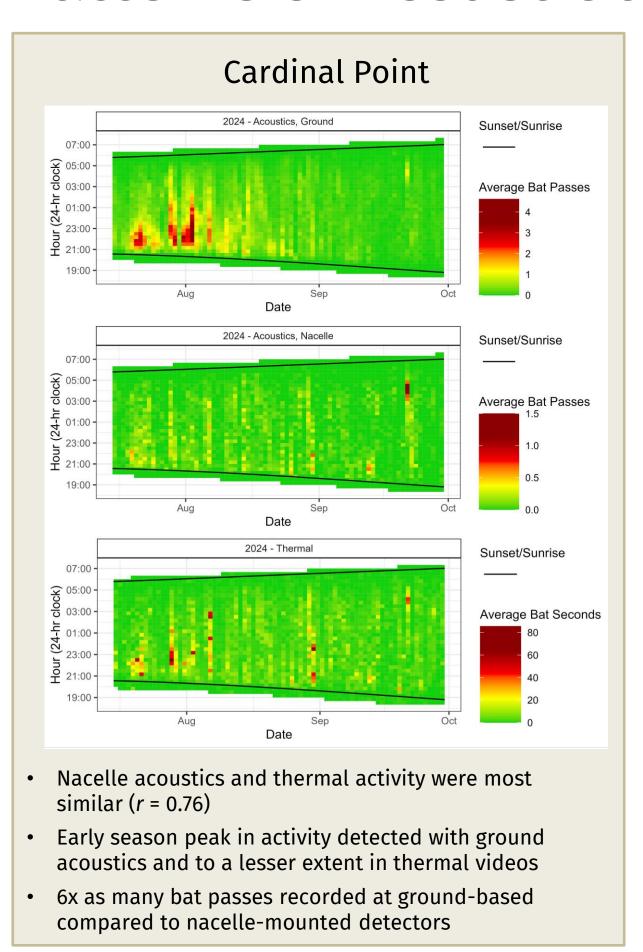

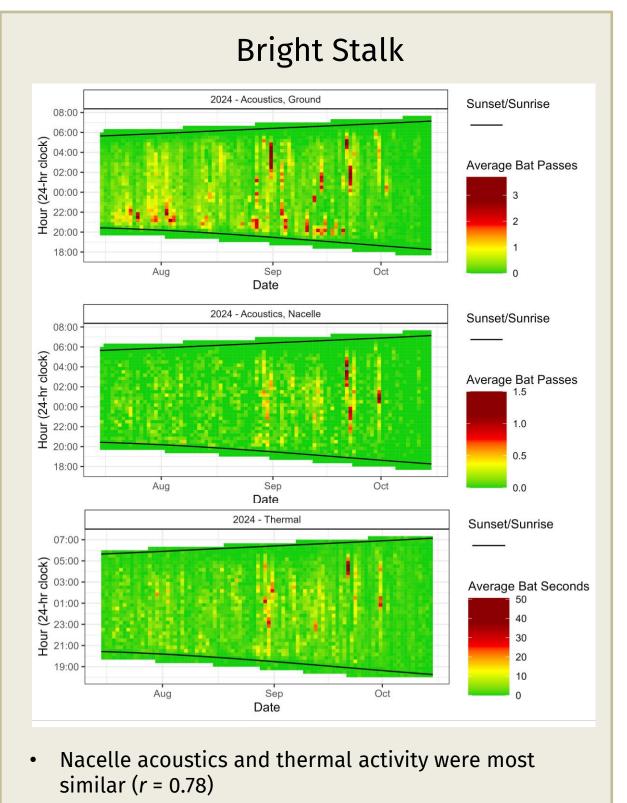


- Higher activity from late August until October than at the other two sites
- sunset detected with ground acoustics
- Consistently high activity in the first two hours after

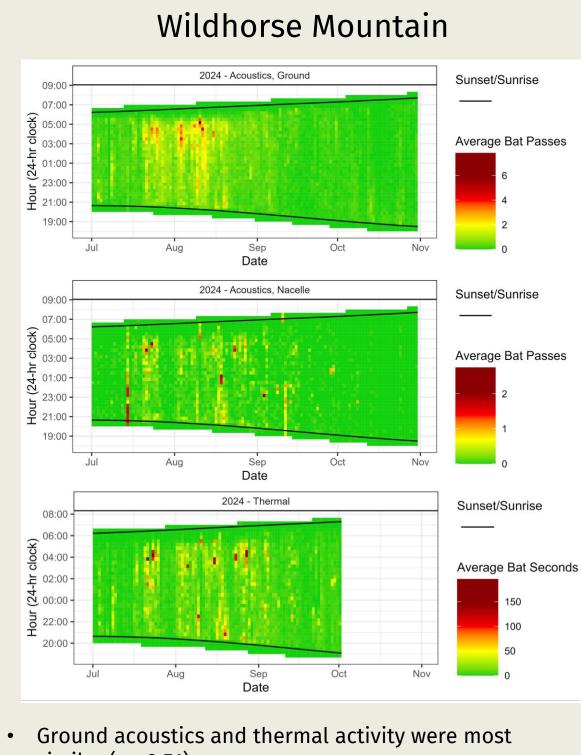

- similar (r = 0.51)
- Higher concentration of activity detected in the early morning hours (2-4 hours before sunrise) for all three sensor types than at the other two sites
- Highest levels of overall bat activity

### Test of OSC vs Blanket Curtailment in 2024

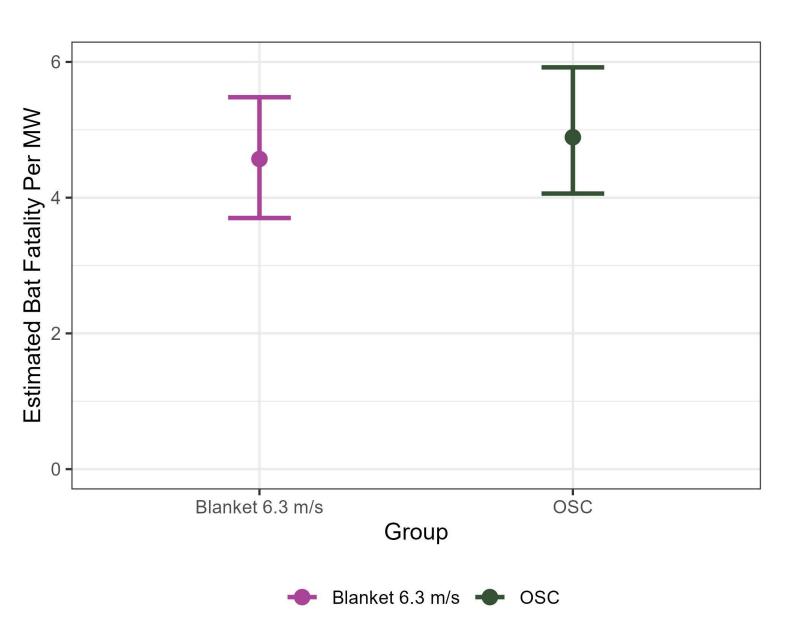


Project Goal: Reduce power losses while maintaining bat conservation objectives



- Project Results: <u>54% reduction in power losses</u> with equivalent bat conservation
  - Fatality rates did not differ between the two groups
- Estimates of activity "covered" by curtailment were similar in the two groups

### **Next Steps**

2025/2026: Implement OSC and blanket curtailment. Collect PCM, acoustic and thermal activity, and power production data to validate OSC. The blanket curtailment column in each table below reflects the conservation goal of each facility.

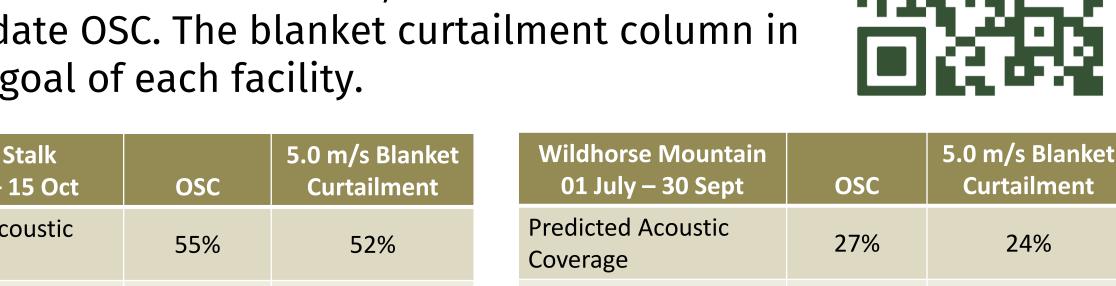

**Predicted Thermal** 

**Predicted Power** 

Coverage

Recovery

36%

18%

30%

Cardinal Point 15 July – 30 Sept	OSC	6.4 m/s Blanket Curtailment
Predicted Acoustic Coverage	69%	69%
Predicted Thermal Coverage	71%	72%
Predicted Power Recovery	25%	

Bright Stalk 15 July – 15 Oct	OSC	5.0 m/s Blanket Curtailment
Predicted Acoustic Coverage	55%	52%
Predicted Thermal Coverage	46%	47%
Predicted Power Recovery	17%	